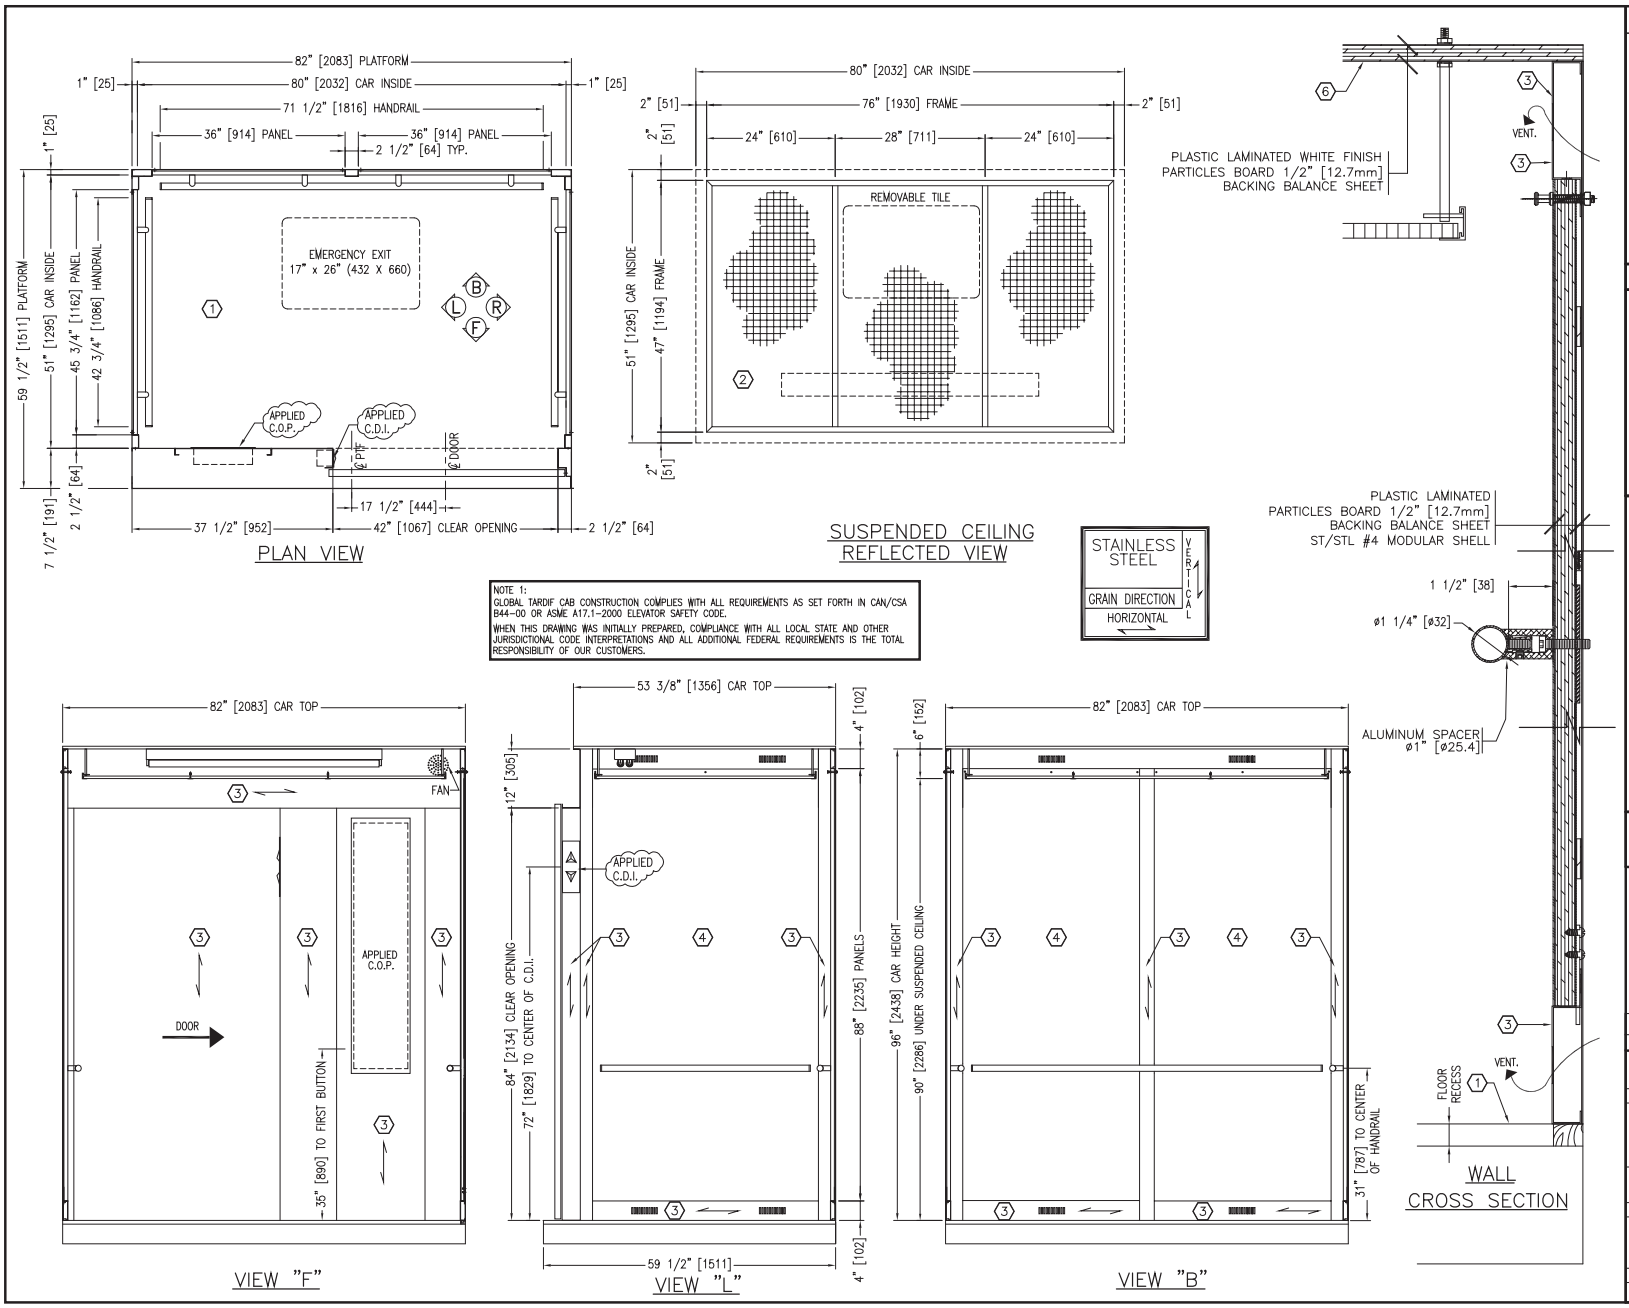

NOTE 1:
GLOBAL TARDIF CAB CONSTRUCTION COMPLIES WITH ALL REQUIREMENTS AS SET FORTH IN CAN/CSA B44-00 OR ASME A17.1-2000 ELEVATOR SAFETY CODE.
WHEN THIS DRAWING WAS INITIALLY PREPARED, COMPLIANCE WITH ALL LOCAL STATE AND OTHER JURISDICTIONAL CODE INTERPRETATIONS AND ALL ADDITIONAL FEDERAL REQUIREMENTS IS THE TOTAL RESPONSIBILITY OF OUR CUSTOMERS.

FINISH DETAILS

1. FLOOR FINISH, BY OTHERS
2. SUSPENDED CEILING : GT-22E
   EGGCRATE PANEL WITH ALUMINIUM WHITE PAINTED FRAME
   WITH DOUBLE FLUORESCENT 48" (DOUBLE BALLAST)
3. STAINLESS STEEL 304 SATIN FINISH (#4)
4. PANELS W/ PLASTIC LAMINATED
   (WILSONART), (COLOR TO BE CONFIRM: _____)
5. HANDRAIL, TUBULAR WITH BLACK PLASTIC END FLAT CAP
   ø1 1/4" ST/STEEL 304 SATIN FINISH (#4)
   AND BRUSHED ALUMINUM BUSHINGS
6. CAR TOP PLASTIC LAMINATED WHITE FINISH

	QTY	DESCRIPTION	GA	No.ASSY
CAB COMPONENTS	1	SHELL ASSEMBLY	18	LSC-SH-2596-ASS'Y
	1	RETURN ASSEMBLY	18	HYB-RET-253035RH-ASSY
	1	STRIKE COLUMN ASSY	18	HYB-STKC-1SP-ASSY-TARDIF
	1	TRANSOM ASSEMBLY	18	HYB-FT-253035RH-ASSY
	1	TOP ASSEMBLY VIEW	–	HYB-TOP-25-ASSY-RH
	1	EGGCRATE SUSPENDED CEILING	–	HYB-SUS-25-DC22E-ASSY
	1	LAMINATED PANELS ASSEMBLY	–	HYB-PAN-25-96-ASSY
	1	HANDRAILS ASSEMBLY	–	
			–	

	QTY	DESCRIPTION	
GENERAL INFORMATION	2	CAB STEADIER :	STANDARD
	1	DOOR OPERATOR TYPE :	GAL MOVFR
	1	CAR SILL :	ALUMINIUM
	1	DOOR DETECTOR :	FORMULA SYSTEM
	1	FAN :	1 SPD
	1	EMERGENCY LIGHT :	IN COP
	1	EMERGENCY EXIT :	STANDARD
	1 SET	PROTECTIVE PAD(S) PER GRP :	WALLS ONLY
	12	PAD HOOKS :	ALUMINUM
	1	(2 GIBS) CAR DOOR :	ST/STL #4
	–	FLOOR FINISH THICK :	–
	–	FLOOR RECESS :	3/4"

QTY. CAB(S) REQ'D:

CAPACITY:
2500 LBS (1150 KG)
INT.SURFACE:
28.33 SQ.FT. (2.63 m ²)

REV.:	DATE:	DESCRIPTION:	BY:
0		FOR APPROVAL	

DRAWING NAME: GT-ECHO CAB WITH GT-22E
ELEVATOR(S) NUMBER:
DETAILS:
PROJECT NAME:
LOCATION:

LE GROUPE MANUFACTURIER D'ASCENSEURS
GLOBAL TARDIF
ELEVATOR MANUFACTURING GROUP

DRAWN BY: L.T | VERIFIED BY: | DATE: | SCALE: N.T.S.
REF.: | DRAWING #: R&D MRL | SHEET: 1 OF 1 | REV: 0