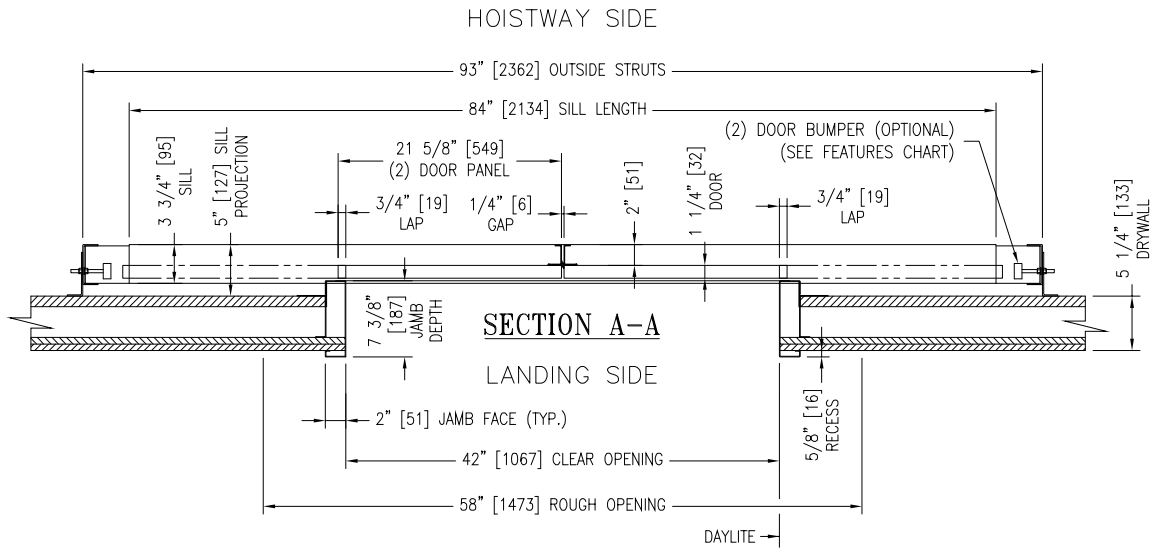

TYPICAL STANDARD DRYWALL

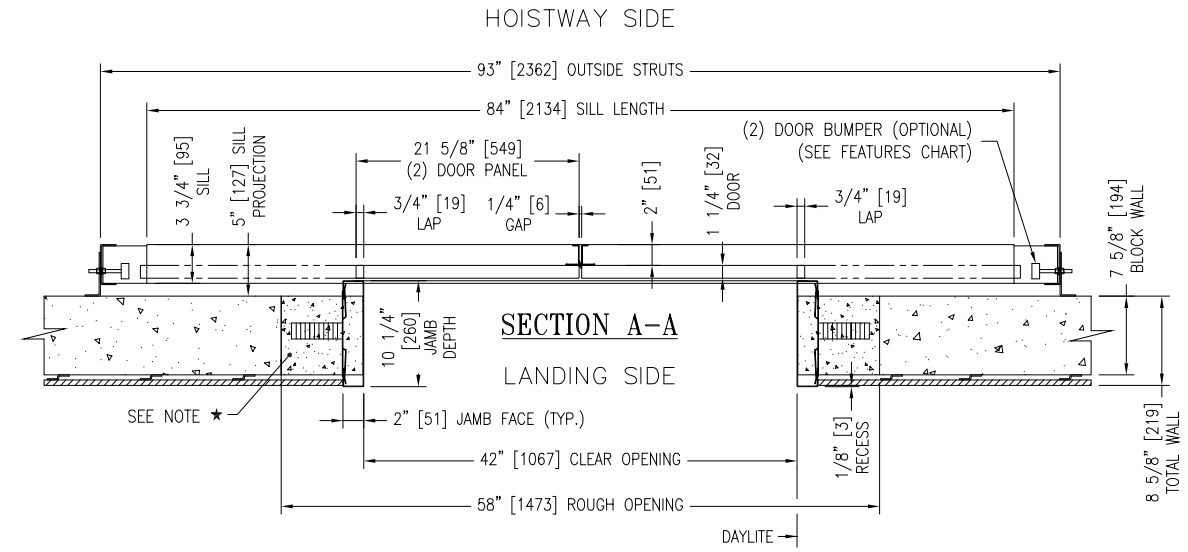

TYPICAL STANDARD CMU WALL

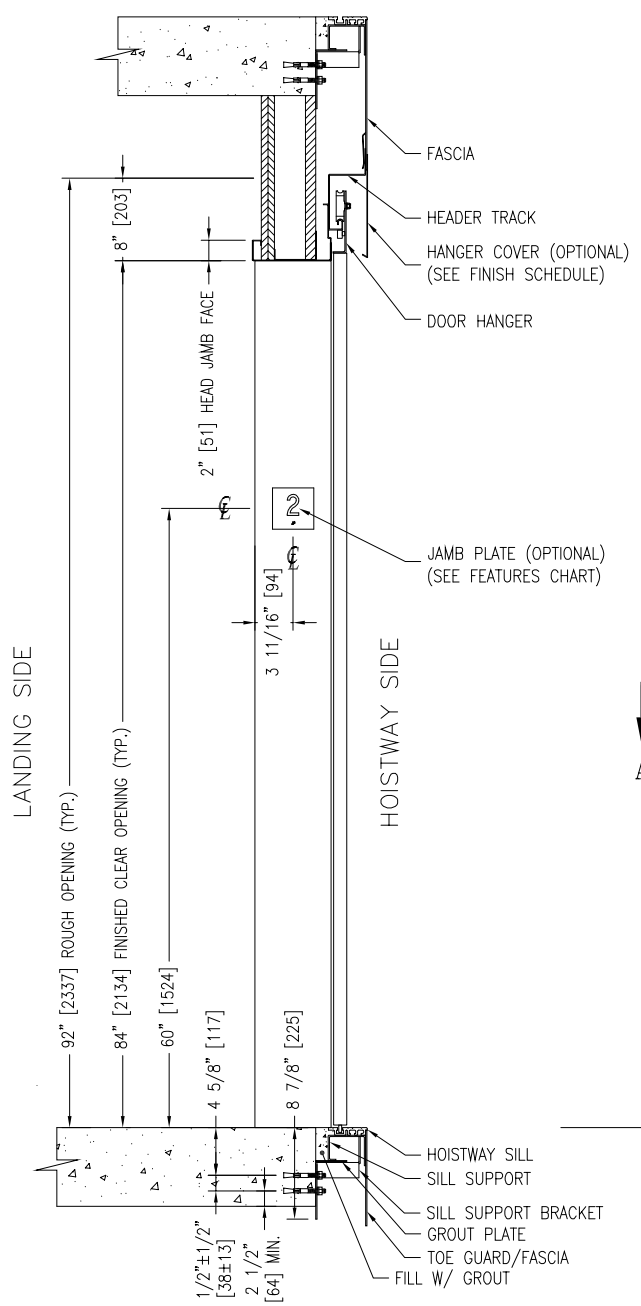

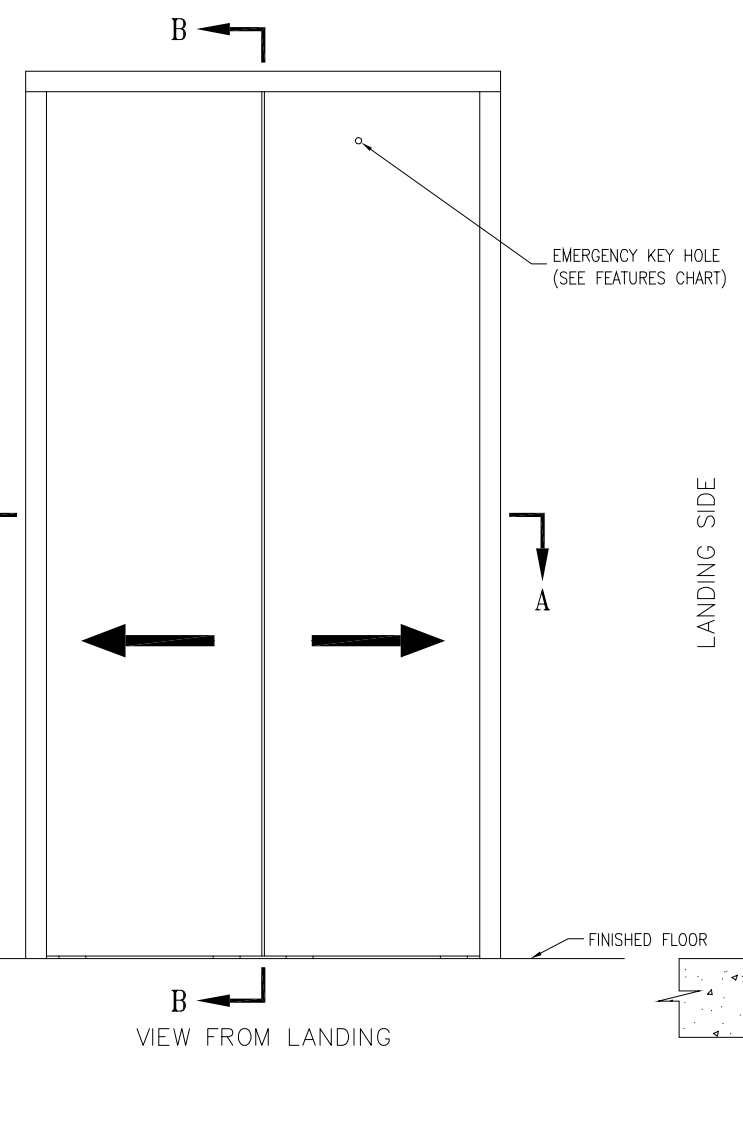

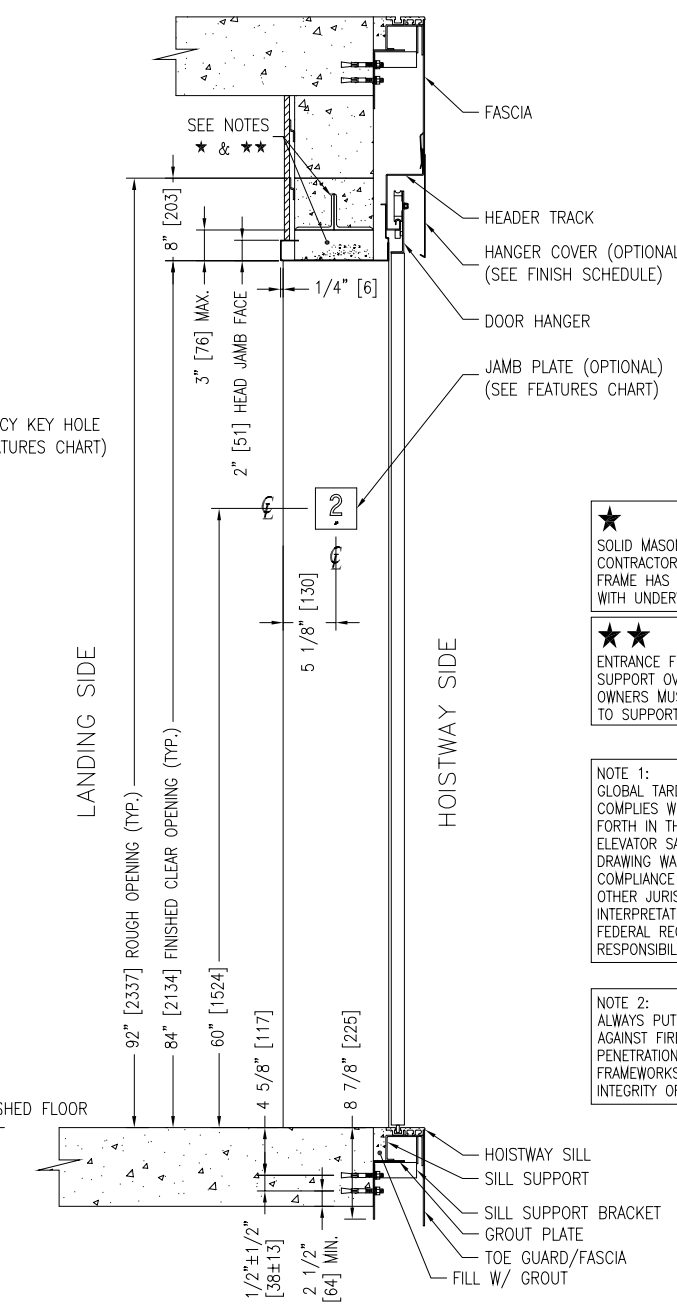

★
SOLID MASONRY GROUTING BY GENERAL CONTRACTOR TO BE POURED ONCE THE FRAME HAS BEEN SET IN PLACE TO COMPLY WITH UNDERWRITERS LABORATORIES.

★★
ENTRANCE FRAMES ARE NOT DESIGNED TO SUPPORT OVERHEAD WALL LOADS. OWNERS MUST PROVIDE SUITABLE MEANS TO SUPPORT THESE LOADS.

NOTE 1:
GLOBAL TARDIF ENTRANCE CONSTRUCTIONS COMPLIES WITH ALL REQUIREMENTS AS SET FORTH IN THE LATEST ANSI A17.1 AND B44 ELEVATOR SAFETY CODE. WHEN THIS DRAWING WAS INITIALLY PREPARED, COMPLIANCE WITH ALL LOCAL STATE AND OTHER JURISDICTIONAL CODE INTERPRETATIONS AND ALL ADDITIONAL FEDERAL REQUIREMENTS IS THE TOTAL RESPONSIBILITY OF OUR CUSTOMERS.

NOTE 2:
ALWAYS PUT AN ADDITIONAL PROTECTION AGAINST FIRE WHEN YOU HAVE PENETRATIONS OF FIXTURES WITHIN THE FRAMEWORKS IN ORDER TO MAINTAIN THE INTEGRITY OF THE HOISTWAY WALL.

FINISH SCHEDULE	
FRAME FINISH:	
FACE DOOR FINISH:	
BACK DOOR FINISH:	LIGHT GREY PRIMER
SIGHTGUARD MAT. / FINISH:	
HEADER FINISH:	SATINCOAT
HANGER COVER FINISH:	SATINCOAT OR GALVANIZED
STRUT FINISH:	GALVANIZED
SILL SUPPORT FINISH:	GALVANIZED
SILL TYPE / MATERIAL:	EXTRUDED / ALUMINUM
FASCIA FINISH:	SATINCOAT OR GALVANIZED
TOE GUARD OR PIT FASCIA FINISH:	SATINCOAT OR GALVANIZED
DUST COVER FINISH:	SATINCOAT OR GALVANIZED
FEATURES CHART	
CONTRUCTION TYPE:	BOLTED
ACCESS KEY SWITCH IN JAMB:	NOT INCLUDED
ELEV. / FLOOR:	---
JAMB LOCATION:	---
TYPE:	---
FINISH:	---
H. BUTTON IN FACE JAMB:	NOT INCLUDED
ELEV. / FLOOR:	---
JAMB LOCATION:	---
INCONSPICIOUS RISER:	NOT INCLUDED
ELEV. / FLOOR:	---
JAMB LOCATION:	---
KEY HOLE: (W/ SLEEVE)	
ELEV. / FLOOR:	---
SOUND DEADENING:	NOT INCLUDED
DOOR BUMPERS IN STRUT:	NOT INCLUDED
JAMB PLATE:	
ELEV. / FLOOR:	---
STYLE:	RJ4 – 4" X 4" STICK ON – COMPANY: SCS
FINISH:	PLASTIC – WHITE ON BLACK BACKGROUND
STAR OF LIFE:	NOT INCLUDED
ELEV. / FLOOR:	---
DOOR GIBS:	2 PER PANEL
TIE ANGLE:	TYPICAL QTY: 4 x 23.5" PER ENTRANCE
JOB APPLICATION:	
ENTRANCE TYPE:	ECONO
FIRE RATED:	ULI 1 1/2 HR
INTERLOCK KIT:	G.A.L.
ELEVATOR USE:	
SPEED & CAPACITY:	
TOTAL ENTRANCE QTY:	
TOTAL ELEVATOR QTY:	
FLOOR(S) SERVED:	

IMPORTANT

REV.:	DATE:	DESCRIPTION:	BY:
0		FOR APPROVAL	

DRAWING NAME: CENTER OPENING 42" X 84" [1067 X 2134]

ELEVATOR(S) NUMBER:

DETAILS:
TOTAL WALL (BLOCK) 8 5/8" [219]
DRYWALL 5 1/4" [133]

PROJECT NAME:

LOCATION:

LE GROUPE MANUFACTURIER D'ASCENSEURS
GLOBAL TARDIF
ELEVATOR MANUFACTURING GROUP

DRAWN BY:	VERIFIED BY:	DATE:	SCALE: N.T.S.
REF.:	DRAWING #:	SHEET:	REV: 0