

<p style="font-size: small;">Groupe manufacturier d'ascenseurs</p> <div style="text-align: center;">  </div> <p style="font-size: small;">120 rue de Naples, St Augustin de Desmaures, Qc, Canada, G3A 2Y2 P. 418.878.4116 F. 418.878.1595 Email : info@globaltardif.com</p>	<h2 style="margin: 0;">Vertical Platform Lift (Inside application)</h2> <h3 style="margin: 0;">GT SmartLift™</h3> <p style="margin: 0;">Meets B355-M00 , B613M00, ASME A18.1</p>	<h2 style="margin: 0;">REQUEST FOR PRICING (RFP)</h2> <h3 style="margin: 0;">GT Accessibility</h3> <p style="margin: 0; font-size: small;">Update: 2007-02-07</p>
---	--	---

Date : \_\_\_\_\_ Number of unit: \_\_\_\_\_ Estimate #:   
To be completed by Global Tardif

Company Name : \_\_\_\_\_ Job Name : \_\_\_\_\_

Contact name: \_\_\_\_\_ Location : \_\_\_\_\_  
City, Province/State, Country

**NOTE:** All completed RFP's can be either faxed to 418.878.1595 or emailed to [info@globaltardif.com](mailto:info@globaltardif.com)

**General Information:** Please visit our web at [www.gtaccessibility.com](http://www.gtaccessibility.com) for additional information

Machine location : <u>Inside the tower</u> Remote : _____ Qty of elevators : _____ Capacity : <b>750 LBS</b> Speed : _____	Applicable Code : _____ Public application <input type="checkbox"/> Residential application <input type="checkbox"/> Main line Voltage : _____ 120 / 1 / 60
Number of Stops : <input type="text"/> Front Openings : <input type="text"/> Rear Openings : <input type="text"/> Side Openings : <input type="text"/> Total Travel : _____ Inches Pit Depth : <u>3"</u> <u>Standard</u> Overhead : <input type="text"/>	Floor designation : <input style="width: 150px;" type="text"/> Floor designation : <input style="width: 150px;" type="text"/> Floor designation : <input style="width: 150px;" type="text"/> Inside cab dimension (w x d) : <input style="width: 40px;" type="text"/> x <input style="width: 40px;" type="text"/> Inches Hoistway size : <input style="width: 40px;" type="text"/> x <input style="width: 40px;" type="text"/> Inches

**Base Unit Selection**

**No enclosure**     
  **Enclosure by G.C**     
  **Enclosure by Global Tardif**

**If enclosure supplied by Global Tardif**

Enclosed Steel insert  
 Enclosed Plexi-Glass insert  
 Enclosed Glass insert  
 Additional Enclosure Height Above top landing 90 1/4"  
 Additional Enclosure Roof Include additional Enclosure height

**SCREW**  
 SmartLift "S - SDR" - Travel up to 120"      Speed: 4 FPM

**or**  
 **HYDRAULIC**  
 SmartLift "S" - HR - Travel up to 264"      Speed: 15 FPM


Hydraulic oil \*\* ( 1 x 5 gal or 20 lt )      Hydraulic series only  
*\*\* GT will not ship to Canada or US any hydraulic oil - Only pick up at the plant*

## Landing Door & Gate

### If no enclosure

Public " S " package - Anti-crushing under panel sensor, auto fold-up ramp, pit switch, alarm

### If enclosure supplied by General Contractor (G.C.) or Global Tardif

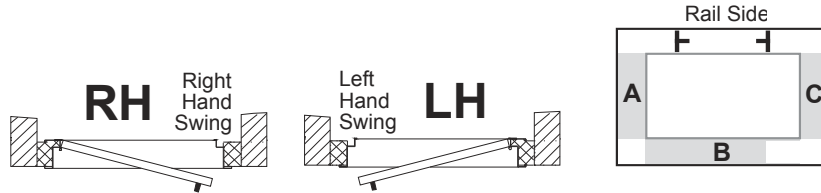

	Level 1	Level 2	Level 3	Level 4
RH Swing or LH Swing				
Door Location A, or C				

### GT-Swing Door \*\*\* All GT Swing Doors are made with Besa Nato White Aluminum tubing

- GT-Swing Door - UL/ULC 1 1/2 hr Zinc coated w/ vision glass, closers **Prud'Homme lock** - 36" (914 x 80"(2032mm)
- GT-Swing Door \*\*\* Alu. Frame Plexiglass insert Closer Prud'homme lock 34" (864mm) x 80"(2032mm)
- GT-Swing Door \*\*\* Alu. Frame Lexan insert Closer Prud'homme lock 34" (864mm) x 80"(2032mm)
- GT-Swing Door \*\*\* Alu. Frame Laminated glass Closer Prud'homme lock 34" (864mm)
- " Clear anodized Aluminum " GT Swing Door framing
- Custom Swing Door closers , Prud'Homme lock - 36" (914 mm) x 80" (2032 mrr

### GT-Swing Gate \*\*\* All GT Swing Gates are made with Besa Nato White Aluminum tubing x 42 1/4" (1073mm)

- GT-Swing Gate \*\*\* Alu. Frame Aluminum insert Closer Prud'homme lock 34" (864mm) x 42 1/4" (1073mm)
- GT-Swing Gate \*\*\* Alu. Frame Plexiglass insert Closer Prud'homme lock 34" (864mm) x 42 1/4" (1073mm)
- GT-Swing Gate \*\*\* Alu. Frame Lexan insert Closer Prud'homme lock 34" (864mm) x 42 1/4" (1073mm)
- GT-Swing Gate \*\*\* Alu. Frame Laminated Glass Closer Prud'homme lock 34" (864mm)
- ' Clear anodized Aluminum " GT Swing gate framing
- Custom Swing Gate closers , Prud'Homme lock - 36" (914 mm) x 80" (2032 mm)

- Custom paint color GT-Swing Door or GT-Swing Gate
- Brass kickplate and push plate ( instead of stainless )
- Aluminum checker plate sill

Automatic door operator - On surface for full size doors

- Locks Only - GAL door interlock
- Locks **Only** - Prudhomme s.a door interlock

## Platform Dimension and options

- Standard platform size at 34" width x 54" depth
- Standard platform size at 34" width x 60" depth
- Cab size 34" width x 48" depth platform -Cannot be used with folding ramp
- Front opening only - Enter / Exit same side Standard size
- Custom platform 90 degree - front & side exit
  
- Custom platform size up to 15 square feet  
Confirm Inside cab. Dimension: W:  inches D:  inches
  
- Platform folding seat
- Rubberized flooring - Diamond Plate Mat Black

**Car Cab options**

- Standard Cab wall - GT Selection                      Choice of Two (2) colour of melamine inserts
  - Additional Stainless steel tubular handrail                      Commercial model
  - Platform gate, lock and spring door closer
  - Phone cabinet ( phone & line by others )
  - Hands-free phone on platform ( phone line by others )
  - CUSTOM Cab
- Specify:

**FIXTURES options**

- Keyless Call Station only
- Keyless Call & Send Station
- Keyed Call Station only
- Keyed Call & Send Station
- Call & In Use Hall station                      Econo                      Mueller
- Call station    Luxury                      US91
- Keyed call station                                      Econo                      Mueller
- Key lock out hall call & In Use station                      Econo                      Mueller
- Key lock out hall call & In Use station                      Luxury                      US91
- Additional Key switch or Floor lock out key switch in Hall or Car panel
  
- Upgrade Luxury line Car Operating panel                      US91 stainless steel
- Brass car control station plate
- Digital PI                      Dot Matrix                      2" Character
- Multi-Lights PI, max 6 stops                                      US91

**GENERAL**

- To paint the entire SmartLift Unit - Besa Nato white
- To paint the entire SmartLift Unit - Optional Color
- Touch Up paint - Spay can
- Fixed inclined access ramp to platform - for interior or enclosed lift ( 12 : 1 )
- Custom Fixed inclined access ramp to platform - for interior or enclosed lift    Specify Slope: \_\_\_\_ : 1
- Galvanized steel fascia per 12"
- Stainless steel fascia per 12"

**Clarifications, Comments or Alternate**

---



---



---