
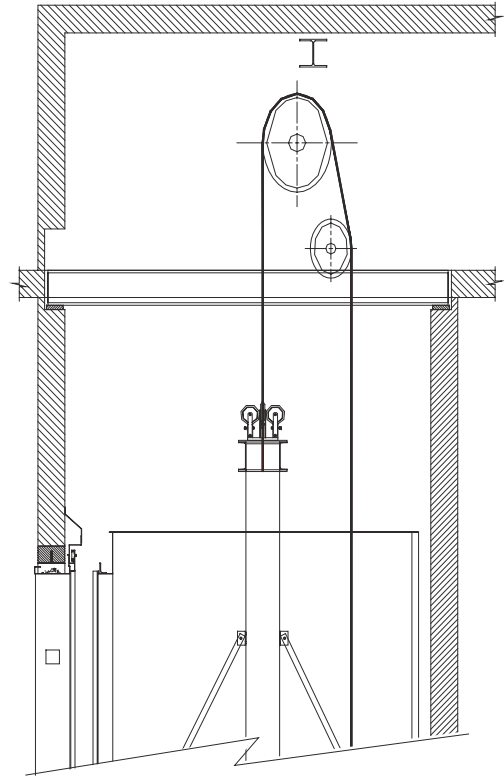


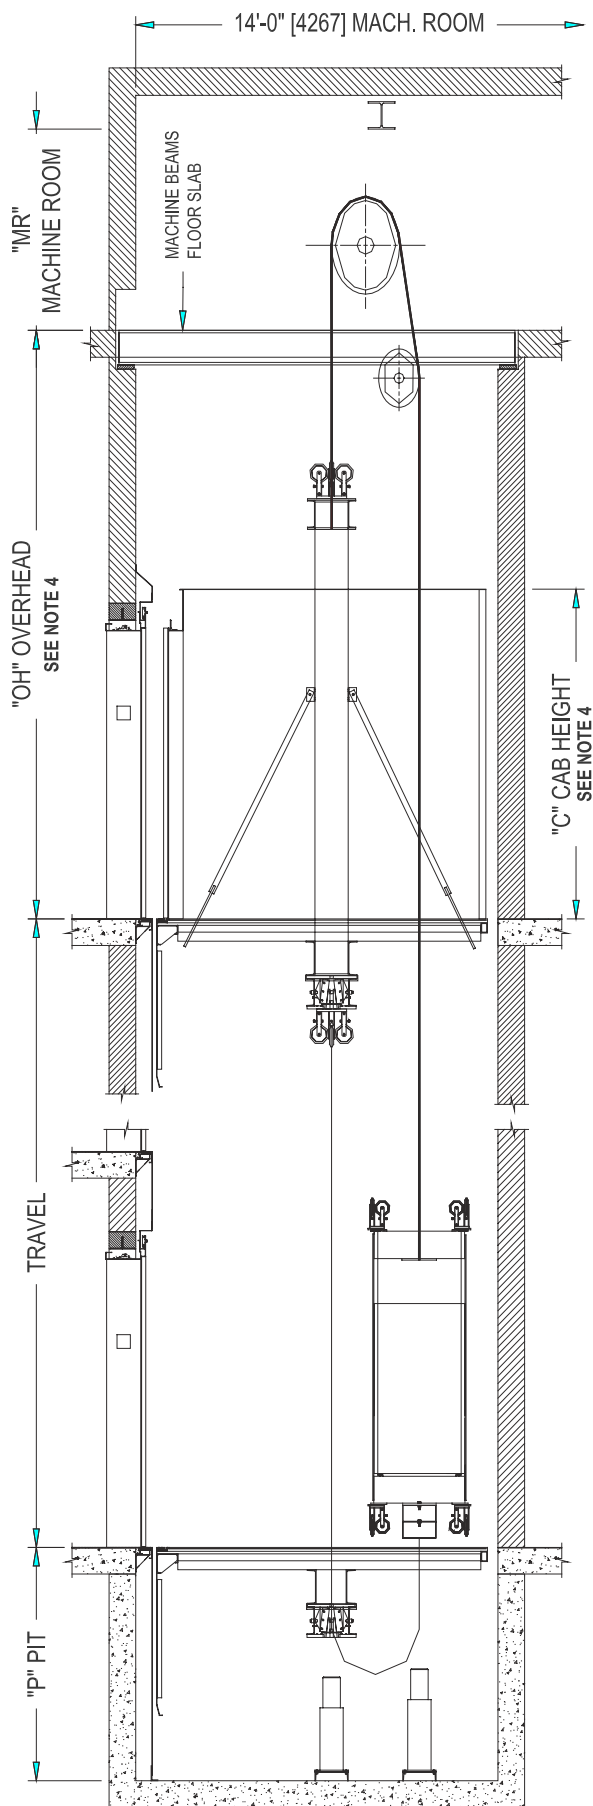

Speed fpm (m/s)	Min. Overhead (Deflector sheave in Overhead) ^④	Min. Overhead (Sheave in machine room)	Pit Depth
	OH	OH	P
150-200 (0.75-1)	16'-6" (5030 mm)	15'-0" (4570 mm)	5'-6" (1675 mm)
250-350 (1.25-1.75)	17'-6" (5335 mm)	16'-0" (4875 mm)	
400 (2)	18'-6" (5640 mm)	17'-0" (5180 mm)	6'-0" (1830 mm)
450-500 (2.25-2.5)	19'-6" (5945 mm)	18'-0" (5485 mm)	6'-6" (1980 mm)


④ Designed for 8'-0" [2440] high cab. For 9'-0" [2745] high Cab, Overhead + 1'-0" [305], For 10'-0" [3050] high Cab, Overhead + 2'-0" [610]

Project : _____

Location: _____

Traction Geared Overhead HOSPITAL TYPE Elevation View

Groupe manufacturier d'ascenseurs

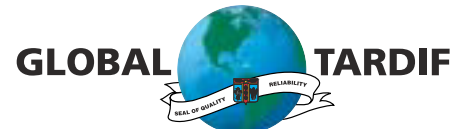

Elevator Manufacturing Group