



TYPICAL STANDARD DRYWALL

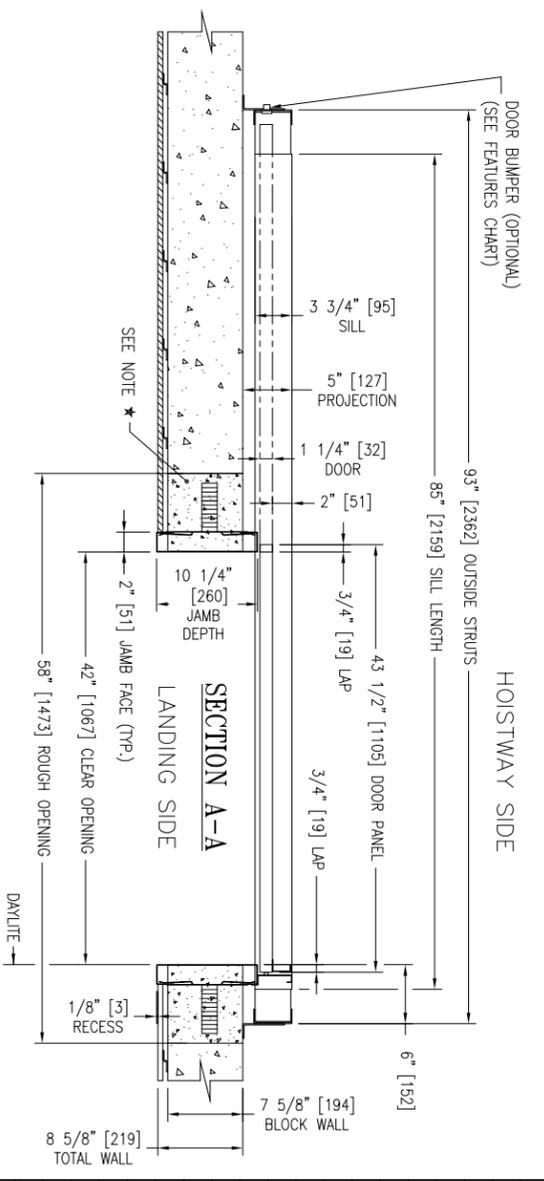


TYPICAL STANDARD CMU WALL

SECTION B-B

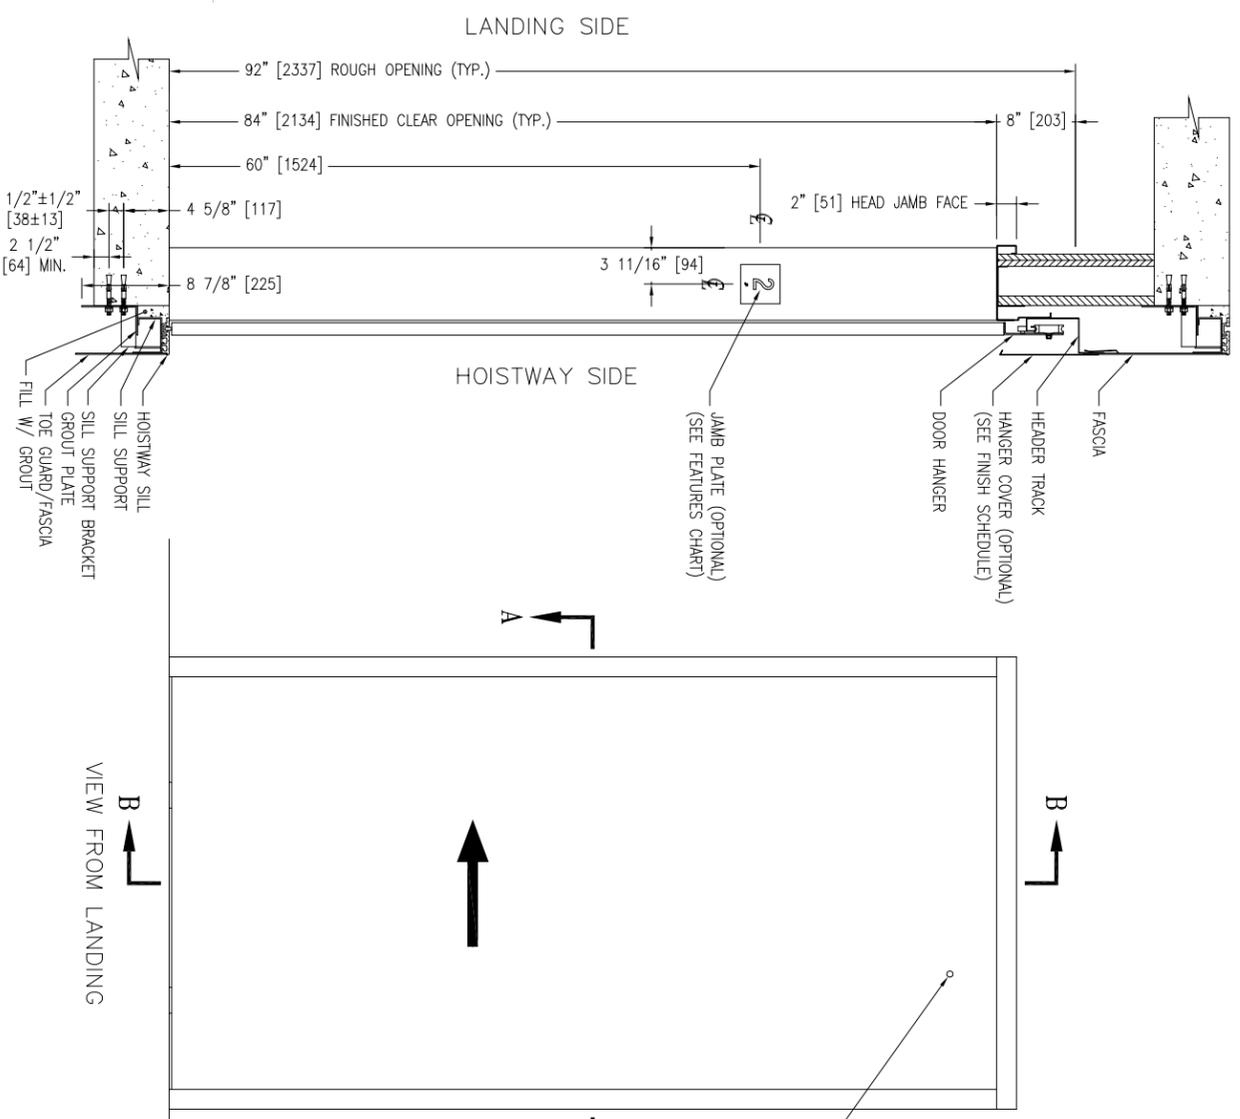

SECTION B-B

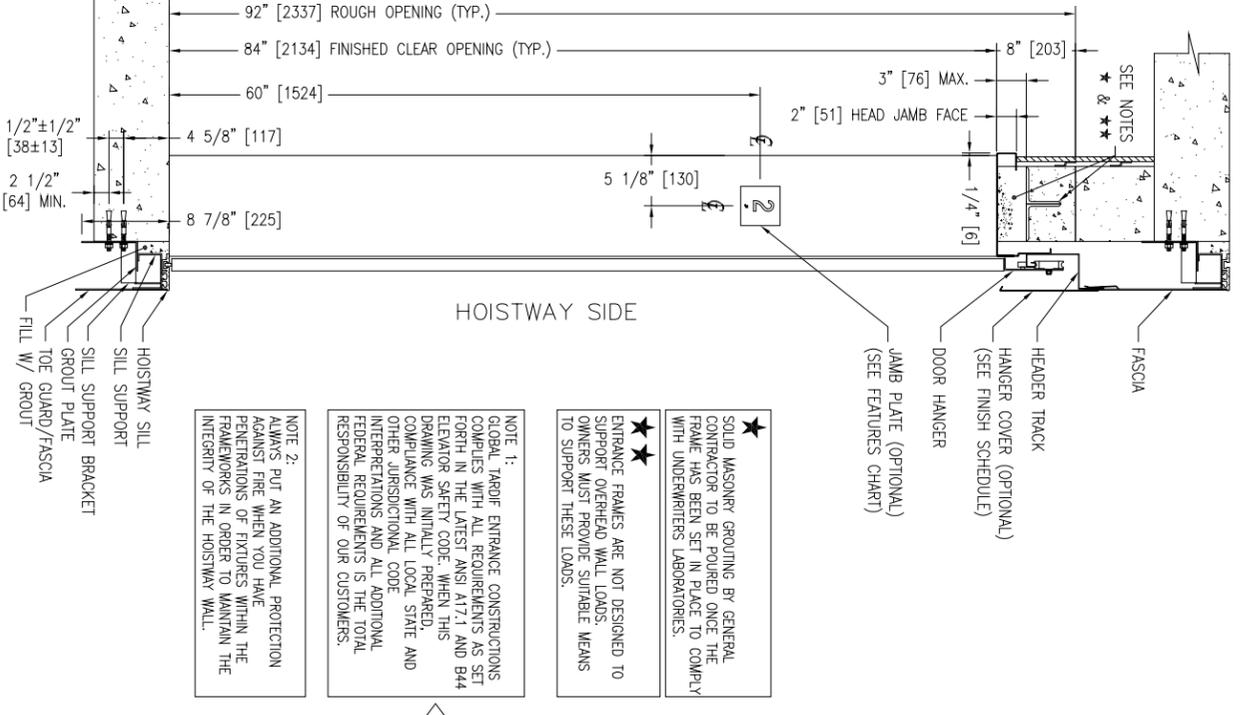

- NOTE 1:**
GLOBAL TARDIF ENTRANCE CONSTRUCTIONS COMPLIES WITH ALL REQUIREMENTS AS SET FORTH IN THE LATEST ANSI A17.1 AND B44 ELEVATOR SAFETY CODE. WHEN THIS DRAWING WAS INITIALLY PREPARED, COMPLIANCE WITH ALL LOCAL STATE AND OTHER JURISDICTIONAL CODE, FEDERAL REQUIREMENTS AND ALL ADDITIONAL INTERPRETATIONS IS THE TOTAL RESPONSIBILITY OF OUR CUSTOMERS.
- NOTE 2:**
ALWAYS PUT AN ADDITIONAL PROTECTION AGAINST FIRE WHEN YOU HAVE PENETRATIONS OF FIXTURES WITHIN THE FRAMEWORKS IN ORDER TO MAINTAIN THE INTEGRITY OF THE HOISTWAY WALL.
- ★ SOLID MASONRY GROUTING BY GENERAL CONTRACTOR TO BE POURED ONCE THE FRAME HAS BEEN SET IN PLACE TO COMPLY WITH UNDERWRITERS LABORATORIES.
 - ★★ ENTRANCE FRAMES ARE NOT DESIGNED TO SUPPORT OVERHEAD WALL LOADS. OWNERS MUST PROVIDE SUITABLE MEANS TO SUPPORT THESE LOADS.

FINISH SCHEDULE	
FRAME FINISH:	
FACE DOOR FINISH:	LIGHT GREY PRIMER
BACK DOOR FINISH:	
SIGHTGUARD MAT. / FINISH:	SATINCOAT
HEADER FINISH:	SATINCOAT OR GALVANIZED
HANGER COVER FINISH:	GALVANIZED
STRUT FINISH:	EXTRUDED / ALUMINIUM
SILL SUPPORT FINISH:	SATINCOAT OR GALVANIZED
SILL TYPE / MATERIAL:	SATINCOAT OR GALVANIZED
FASCIA FINISH:	SATINCOAT OR GALVANIZED
TOE GUARD OR PIT FASCIA FINISH:	SATINCOAT OR GALVANIZED
DUST COVER FINISH:	SATINCOAT OR GALVANIZED

FEATURES CHART

CONSTRUCTION TYPE:	BOLTED
ACCESS KEY SWITCH IN JAMB:	NOT INCLUDED
ELEV. / FLOOR:	---
JAMB LOCATION:	---
TYPE:	---
FINISH:	---
H. BUTTON IN FACE JAMB:	NOT INCLUDED
ELEV. / FLOOR:	---
JAMB LOCATION:	---
INCONSPICUOUS RISER:	NOT INCLUDED
ELEV. / FLOOR:	---
JAMB LOCATION:	---
KEY HOLE: (W/ SLEEVE)	---
ELEV. / FLOOR:	---
SOUND DEADENING:	NOT INCLUDED
DOOR BUMBERS IN SIRTU:	NOT INCLUDED
JAMB PLATE:	---
ELEV. / FLOOR:	---
STYLE:	RJ4 - 4" X 4" STICK ON - COMPANY: SOS
FINISH:	PLASTIC - WHITE ON BLACK BACKGROUND
STAR OF LIFE:	NOT INCLUDED
ELEV. / FLOOR:	---
DOOR GRS:	2 PER PANEL
THE ANGLE:	TYPICAL QTY: 4 X 23.5" PER ENTRANCE
ENTRANCE TYPE:	ECONO
FIRE RATED:	UL1 1 1/2 HR
INTERLOCK KIT:	GALL.
ELEVATOR USE:	
SPEED & CAPACITY:	
TOTAL ENTRANCE QTY:	
TOTAL ELEVATOR QTY:	
FLOOR(S) SERVED:	

IMPORTANT

DATE:	FOR APPROVAL	BY:
DRAWING NAME:	SINGLE SPEED RIGHT HAND	
ELEVATOR(S) NUMBER:	42" X 84" [1067 X 2134]	
DETAILS:	TOTAL WALL (BLOCK) 8 5/8" [219]	
	DRYWALL 5 1/4" [133]	
PROJECT NAME:		
LOCATION:		
DRAWN BY:	VERIFIED BY:	DATE:
REF.:	DRAWING #:	SHEET:

