

# GT 100C™

## For Heavy Duty Application

### Commercial Wheelchair Lift

BEST WARRANTY ON THE MARKET

**GT**  
Silver  
**1-Year**  
Warranty\*



- Ideal Lift Solution for Public Application
- Outstanding Quality Performance
- Fully Enclosed Commercial Lift
- Full Cab - 6'-8" (2032 mm) Height
- Up to 1400 lbs Capacity
- Heavy Duty Steel Construction
- Proven Reliability
- All Safety Features Included
- Easy to Install
- Easy to Use
- Low Maintenance
- CSA Approved Components
- Visit Our Website at :

Since 1984, Global-Tardif has earned a top reputation as a manufacturer of field proven, innovative products for the elevator industry. The company has grown to become one of the largest independent manufacturers of elevators in North America.

Global Tardif is proud to introduce its traditional hydraulic **GT 100C™** to complement its complete line of pre-engineered wheelchair lift solutions for commercial applications.

The **GT 100C™** is specially engineered and designed to facilitate access for people with physical disabilities up to 6 floors. The **GT 100C™** is the right choice for building owners and architects looking for an architectural, Heavy Duty vertical wheelchair platform lift.

**GT** [Accessibility.com](http://Accessibility.com)

since 1984



Elevator Manufacturing Group





### Standard Features


- Capacity : 1000 lbs (454 kg)
- Cab height : 6'-8" (2032 mm)
- 1:2 Cable hydraulic drive system
- Speed 30 fpm (0.15 m/sec)
- Max travel: See applicable code
- Overhead 96" (2438 mm)
- Pit depth: 10" (254 mm)
- Slack / Broken cable safety device
- 3 HP motor
- Submersible motor with submersible pump unit **GT100SB-Power™**
- Down speed flow control
- Low pressure switch safety device
- Building voltage: 220V / 1 ph / 60 Hz
- **GT-EZ100™** Controller - Simple & Reliable relay logic
- Constante pressure operation
- Emergency battery lowering device - UPS
- Emergency manual lowering valve
- Two ways levelling
- Emergency switch with alarm
- Emergency pit switch
- "In Use" indicator at all levels
- Phone cabinet (phone not included)

### Options

- Capacity de 1400 lbs
- Optional speed - up to 50 fpm (0,25m/s)
- Reduced pit or overhead
- Direct acting
- Building voltage of 575 / 480 / 208V - 3 ph
- Alternate four (4) melamine panel color selection
- Custom plastic laminate panel finish as per our GT char of Wilsonart
- Rubber mat flooring 1/8" (3 mm)
- Custom stainless or bronze finishes
- Custom size, design and finishes
- Custom cab height
- Glass cab & Glass doors
- Multi-speed valve
- Automatic door operator
- Electric strike - Prud'Homme lock
- Retiring cam
- Hands free phone

### Standard Cab Features

- Stainless Steel #4 modular cab shell reveals and bases
- Melamine panels
- Two (2) standard cab panel colors selection
- Stainless Steel #4 handrail
- Plywood flooring with recess to allow floor finish by others
- Melamine ceiling with two (2) recessed pot lights
- Stainless Steel #4 car operating panel

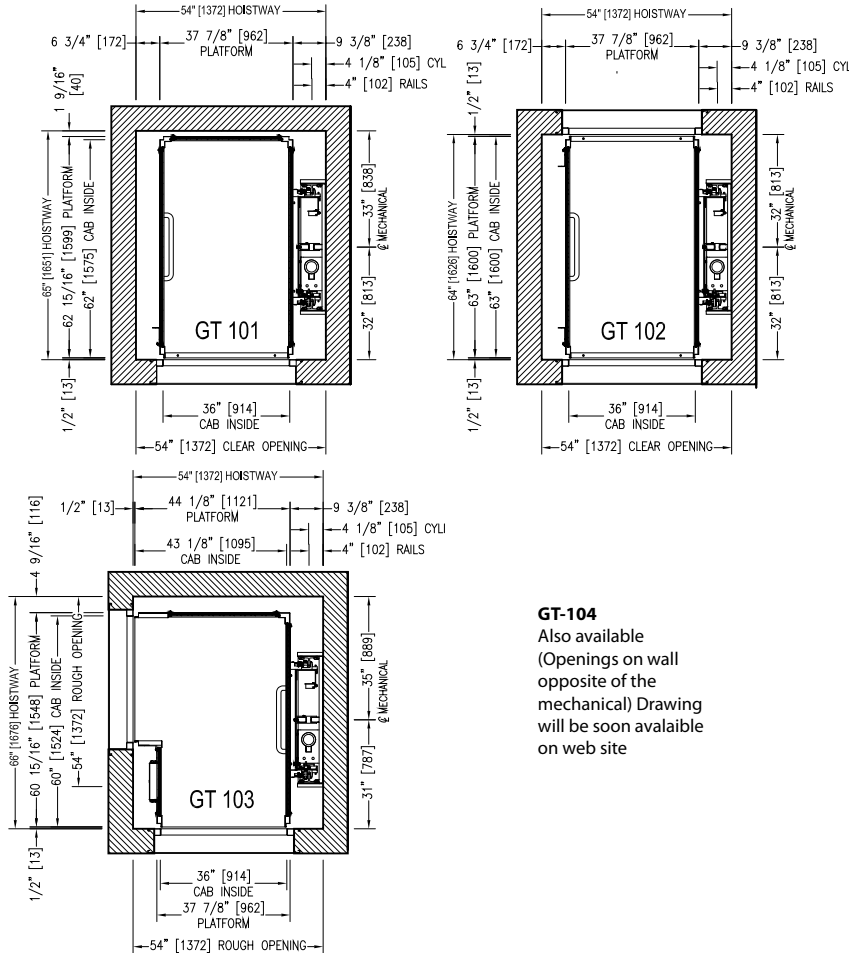

**GT-104**  
Also available  
(Openings on wall  
opposite of the  
mechanical) Drawing  
will be soon available  
on web site

### Landing Entrances Features

- Swing metal door **GT-Swing™**
- 1 1/2 Hr UL/ULC Fire rated entrance assembly
- Wire mesh clear vision glass insert
- Anti skid aluminum sill plate
- GAL door interlock - Type "N"
- Hall stations integrate in door frame
- Hydraulic door closer

Your Authorized Dealer is:

For more information and detailed drawings  
visit our web site at  
[www.gtaccessibility.com](http://www.gtaccessibility.com)



\* The GLOBAL-TARDIF Limited Warranty covers replacement of any defective parts for a period of one (1) year - Labour cost not included.  
GLOBAL-TARDIF reserves the rights to discontinue models or options at any time or change the specifications, materials, equipment or pricing without notice and without incurring obligation.  
U.S. and foreign patents pending. 2004 GLOBAL-TARDIF Elevator Manufacturing Group Inc.