


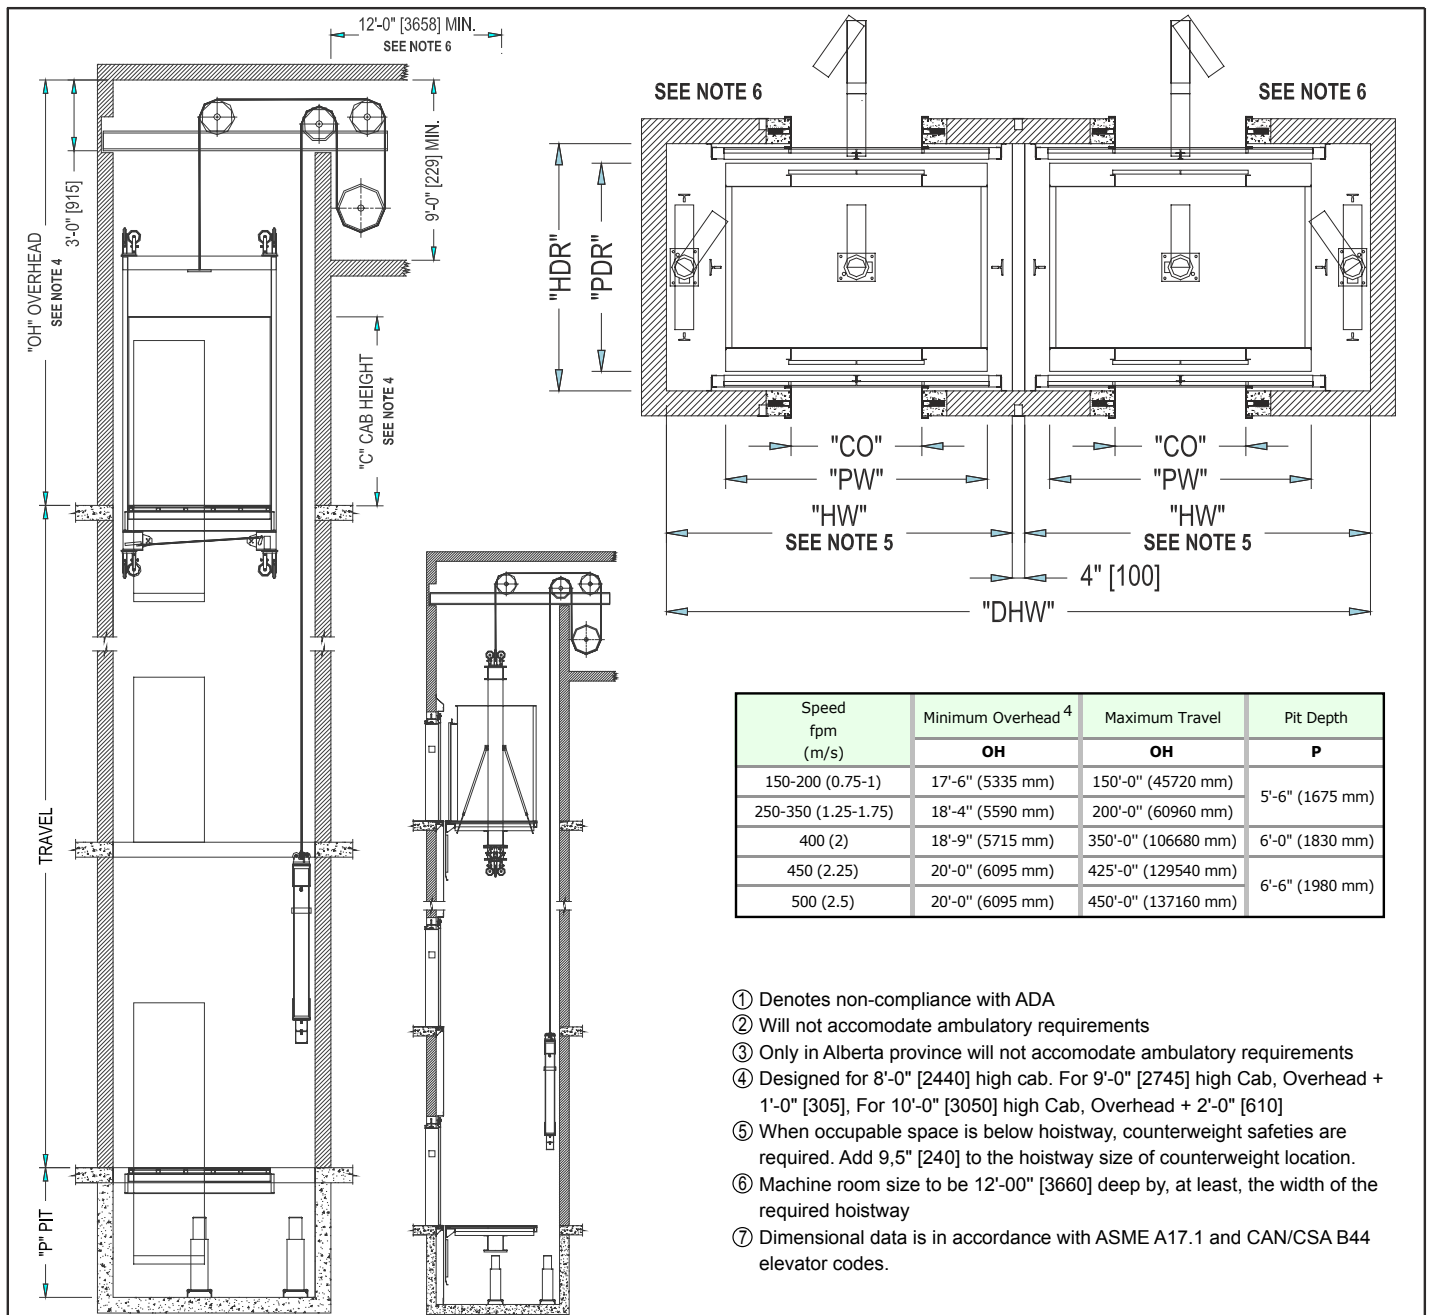

Type of Opening	Capacity lbs (kg)	Speed fpm (m/s)	Hoistway Width	Hoistway Depth	Platform Width	Platform Depth	Cab Inside Width	Cab Inside Depth	Clear Opening
			HWR ⁵	HDR ⁵	PW	PDR	CIW	CID	CO
CO ^{1,2}	2100 (950)	150-500 (0.75-2.5)	8'-3" (2515)	6'-7 1/4" (2015)	6'-0" (1830)	5'-6 3/4" (1695)	5'-8" (1727)	4'-3 3/4" (1314)	3'-0" (915)
CO ²	2500 (1150)	150-500 (0.75-2.5)	9'-3" (2820)	6'-7 1/4" (2015)	7'-0" (2135)	5'-6 3/4" (1695)	6'-8" (2032)	4'-3 3/4" (1314)	3'-6" (1070)
CO ²	3000 (1350)	150-500 (0.75-2.5)	9'-3" (2820)	7'-1 1/4" (2165)	7'-0" (2135)	6'-0 3/4" (1850)	6'-8" (2032)	4'-9 3/4" (1467)	3'-6" (1070)
CO ³	3500 (1600)	150-500 (0.75-2.5)	9'-3" (2820)	7'-9 1/4" (2370)	7'-0" (2135)	6'-8 3/4" (2050)	6'-8" (2032)	5'-5 3/4" (1670)	3'-6" (1070)
CO ³	4000 (1800)	150-500 (0.75-2.5)	10'-3" (3125)	7'-9 1/4" (2370)	8'-0" (2440)	6'-8 3/4" (2050)	7'-8" (2337)	5'-5 3/4" (1670)	4'-0" (1220)

For seismic conditions zone 2 and greater add to dimension (in)[mm]	HW	4" (100 mm)
	HD	1" (25 mm)
	HW Rear Opening	3" (75 mm)

Project : _____

Location: _____

Traction Geared Above/Beside PASSENGER TYPE - Duplex Front & Rear Center Opening

Groupe manufacturier d'ascenseurs



Elevator Manufacturing Group