


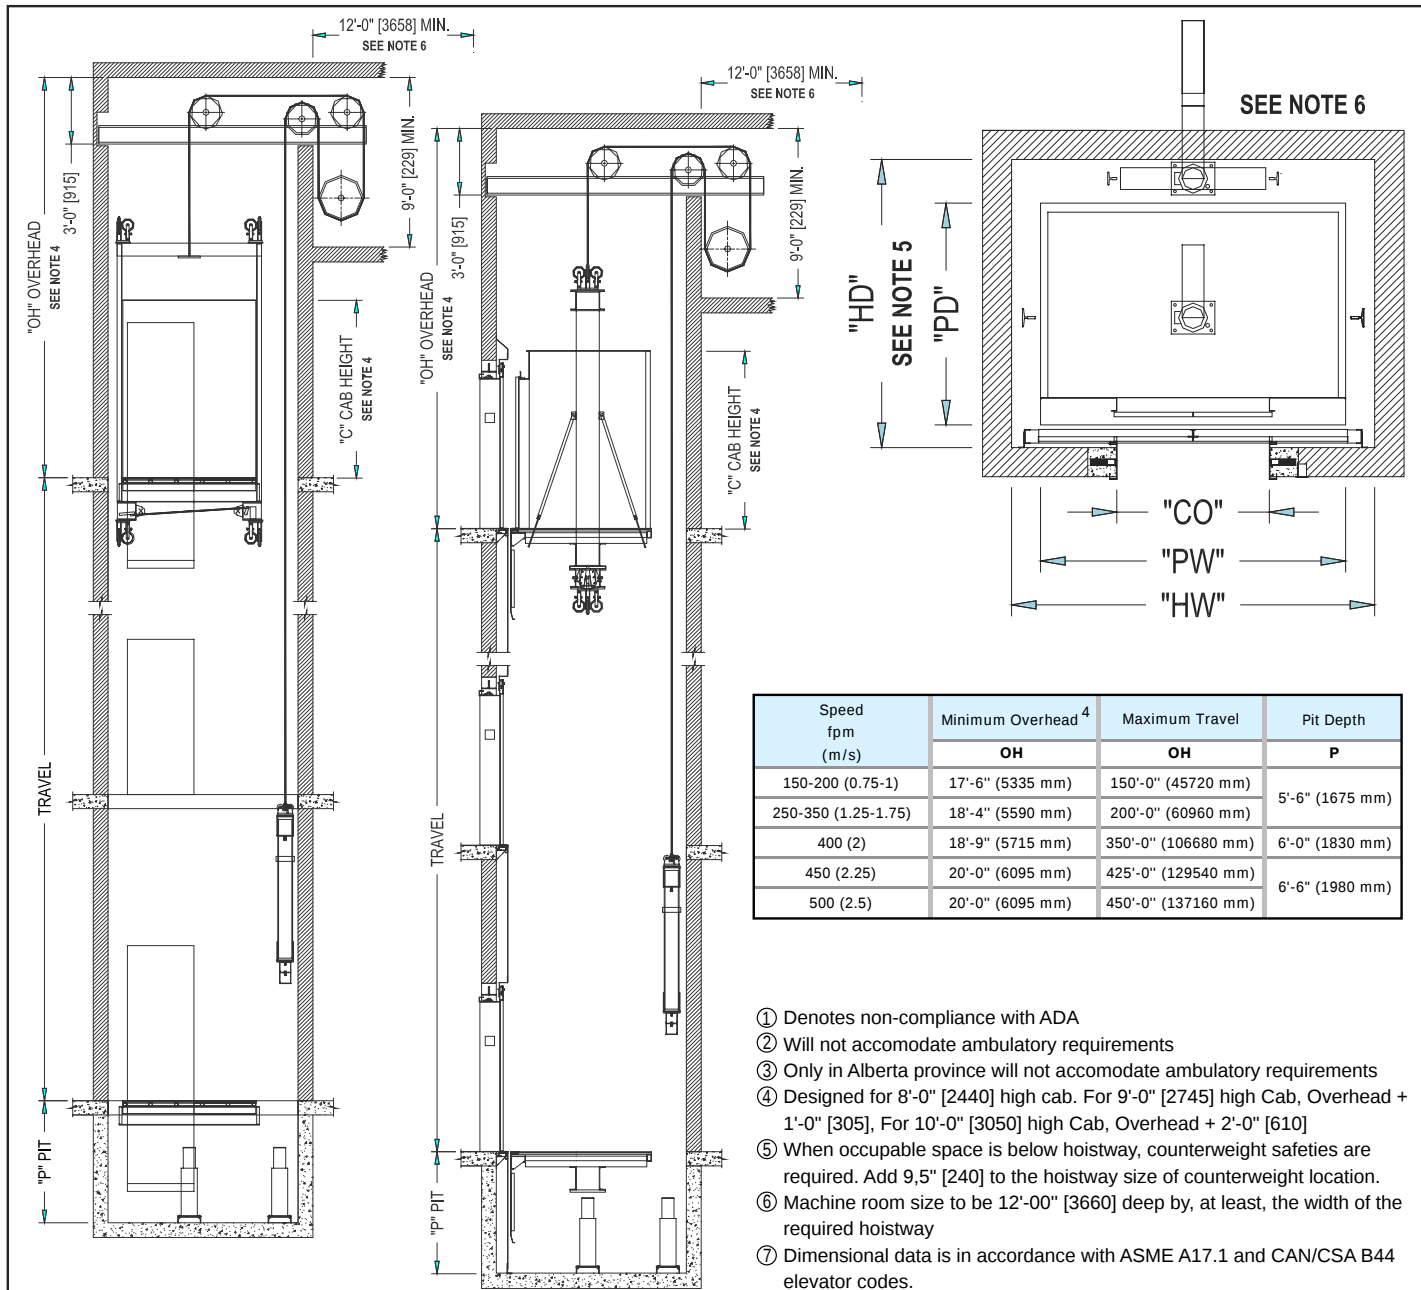

Type of Opening	Capacity lbs (kg)	Speed fpm (m/s)	Hoistway Width	Hoistway Depth	Platform Width	Platform Depth	Cab Inside Width	Cab Inside Depth	Clear Opening
			HW ⁵	HD ⁵	PW	PD	CIW	CID	CO
CO ^{1,2}	2100 (950)	150-500 (0.75-2.5)	7'-4" (2235)	6'-7 1/4" (2015)	6'-0" (1830)	5'-1" (1550)	5'-8" (1727)	4'-3" (1295)	3'-0" (915)
CO ²	2500 (1150)	150-500 (0.75-2.5)	8'-4" (2540)	6'-7 1/4" (2015)	7'-0" (2135)	5'-1" (1550)	6'-8" (2032)	4'-3" (1295)	3'-6" (1070)
CO ²	3000 (1350)	150-500 (0.75-2.5)	8'-4" (2540)	7'-1 1/4" (2165)	7'-0" (2135)	5'-7" (1700)	6'-8" (2032)	4'-9" (1448)	3'-6" (1070)
CO ³	3500 (1600)	150-500 (0.75-2.5)	8'-4" (2540)	7'-9 1/4" (2370)	7'-0" (2135)	6'-3" (1905)	6'-8" (2032)	5'-5" (1651)	3'-6" (1070)
CO ³	4000 (1800)	150-500 (0.75-2.5)	9'-4" (2845)	7'-9 1/4" (2370)	8'-0" (2440)	6'-3" (1905)	7'-8" (2337)	5'-5" (1651)	4'-0" (1220)

For seismic conditions zone 2 and greater add to dimension (in)[mm]	HW	4" (100 mm)
	HD	1" (25 mm)
	HW Rear Opening	3" (75 mm)

Project : _____

Location: _____

Traction Geared Above/Beside PASSENGER TYPE - Simplex Front Center Opening

Groupe manufacturier d'ascenseurs



Elevator Manufacturing Group